

# PROXIMA LED HV 20W BIAŁY IP65 4000K

BULKHEADS

LED



220-240 V | 50-60 Hz | LED |  | IP65 | IK10 | 



## TECHNICAL PARAMETERS

Index:	546297/HV
Ingress protection:	IP65/54
Impact resistance:	IK10
Nominal power [W]:	20
Luminous flux [lm]*:	1450
Colour temperature [K]:	4000
Energy efficiency class:	A
Material of the body:	PP
Diffuser material:	PC
Diffuser type:	OPAL

\*Tolerance +/- 10%


## CHARACTERISTICS

Surface mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

## APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) - particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.

## LIGHT CURVES

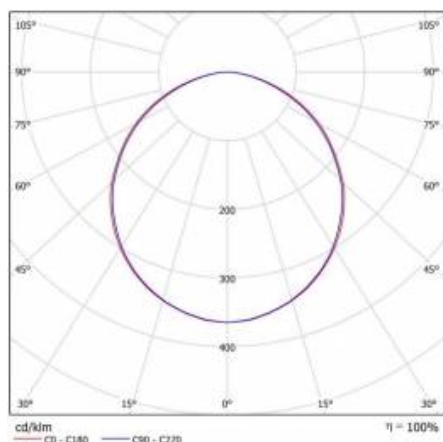

# PROXIMA LED HV 20W BIAŁY IP65 4000K

BULKHEADS

LED

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Net weight of the luminaire [kg]:	1.400
Nominal power [W]:	20	CE certificate:	<a href="#">47/2017</a>
Rated power of the luminaire [W]:	20	Index:	546297/HV
Supply voltage [V]:	220-240	EAN:	5905963546297/HV
Frequency [Hz]:	50 - 60	Category type:	bulkheads
Luminous flux [lm]:	1450	Product line:	basic
Luminous efficacy [lm/W]:	73	ETIM class:	EC002892
Energy efficiency class:	A	LED lifespan L70B50 [h]:	110000
Electrical protection class:	I	LED lifespan L80B20 [h]:	72000
Colour temperature [K]:	4000	LED lifespan L90B10 [h]:	36000
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.53	Warranty [years]:	2
Beam angle [°]:	120	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC		
Diffuser type:	OPAL		
Material of the body:	PP		
Colour of the body:	white		
Dimensions [mm]:	ø390/95		
Impact resistance:	IK10		
Ingress protection:	IP65/54		
Mounting version:	surface		
Working temperature [°C]:	from -20 to +35		

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-04-16



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: [office@lenalighting.pl](mailto:office@lenalighting.pl)  
[www.lenalighting.pl](http://www.lenalighting.pl)



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



47/2017