

PROXIMA LED 24W 4000K

BULKHEADS

LED



220-240 V | 50-60 Hz | LED |  | IP65 | IK10 | 



TECHNICAL PARAMETERS

Index:	311420/PA
Ingress protection:	IP65/54
Impact resistance:	IK10
Nominal power [W]:	24
Luminous flux [lm]*:	2300
Colour temperature [K]:	4000
Energy efficiency class:	A
Material of the body:	PP
Diffuser material:	PC
Diffuser type:	OPAL

*Tolerance +/- 10%


CHARACTERISTICS

Surface mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) - particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.

LIGHT CURVES

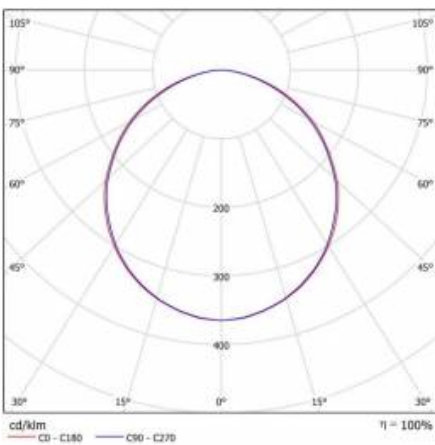

PROXIMA LED 24W 4000K

BULKHEADS

LED

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Net weight of the luminaire [kg]:	1.250
Nominal power [W]:	24	CE certificate:	94/2019
Rated power of the luminaire [W]:	29	Index:	311420/PA
Supply voltage [V]:	220-240	EAN:	5905963311420/PA
Frequency [Hz]:	50 - 60	Category type:	bulkheads
Luminous flux [lm]:	2300	Product line:	standard
Luminous efficacy [lm/W]:	79	ETIM class:	EC002892
Energy efficiency class:	A	LED lifespan L70B50 [h]:	110000
Electrical protection class:	I	LED lifespan L80B20 [h]:	72000
Colour temperature [K]:	4000	LED lifespan L90B10 [h]:	36000
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.90	Warranty [years]:	2
Beam angle [°]:	120	Manual:	Download PDF
Diffuser material:	PC		
Diffuser type:	OPAL		
Material of the body:	PP		
Colour of the body:	white		
Dimensions [mm]:	ø390/95		
Impact resistance:	IK10		
Ingress protection:	IP65/54		
Mounting version:	surface		
Working temperature [°C]:	from -20 to +35		

*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-04-30



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



94/2019