

LED LINEAR LIGHTS



LTP-L1500-50W-X; LTP-L1500-60W-X

FEATURES

- _ High reliability LEDs
- _ High luminous efficiency - 110 lm/W
- _ Color rendering index - Ra>80
- _ Power supply included
- _ Extremely strong aluminum body
- _ Waterproof rated - IP65
- _ Instant start
- _ Easy installation
- _ Ik09

CONTROL OPTIONS

- _ 1-10V
- _ Dali system

APPLICATIONS

- _ Supermarket lighting
- _ Garage lighting
- _ Factory lighting
- _ Gas station lighting
- _ Warehouse lighting


VISUAL APPEARANCE




MAIN SPECIFICATIONS

Product code	LTP-L1500-50W-X	LTP-L1500-60W-X
Available colors	warm white neutral white daylight white cool white	
Color temperature, K	~3000K ~4000K ~5000K ~6500K	
Power, W	50W	60W
Typical luminous flux, lm	5500 Lm	6600 Lm
Dimensions	1500 x 91 x 74 mm	
Protection class	Ip65 Waterproof rated. Extremely rigid and strong aluminum body.	

TECHNICAL DRAWING

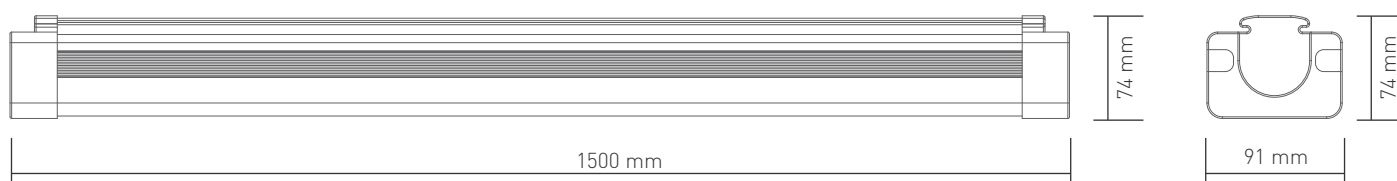

SUSPENDED MOUNTING OPTION

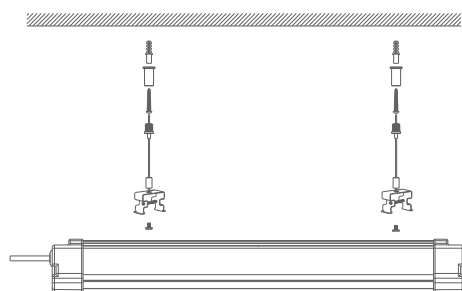

CEILING MOUNTING OPTION

