

LTC-S RP


144x SM G.657.A1 (12x12)

Article number: 77767

Date: 09-03-2023

The Loose Tube Cable Slim Rodent-Protected (LTC-S RP) is a nonmetallic, loose tube outdoor duct cable, rodent protected, longitudinal water-protected, with high pulling force. Due to its slim design (small diameter and light in weight), this cable is perfectly suitable for installation in ducts with limited space. Installation: by blowing or pulling, into conduits or on cable trays.

LTC-S RP
144x SM G.657.A1 (12x12)

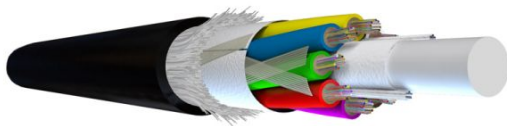

Product characteristics

Cable type	LTC
Fibre type	Single mode 9/125
Optical fibre standard	ITU-T G.657.A1
Number of fibers	144
Number of fibers per optical element	12
Number of cores	12
Optical element	Loose tube, gel filled
Cable metal free	Yes
Number of layers	1 Layer
Strip method	1 Rip cord
Stripability optical element	> 1000 mm, down to primary coating
Strain relief	Yes
Type of strain relief	FRP + E-glass
Material outer sheath	HDPE



Colour outer sheath	Black
Outer sheath thickness	1,2 mm
Outer diameter approx.	12,6 mm
Marking	ACE - TKF LTC-S RP 144x SM G.657.A1 (12x12) A-DQ(ZN)B2Y 77767 {Batch} {Year} {Length}

Application

Standardization	EN IEC 60794-3-10
Test procedures	EN IEC 60794-1-2
Application	Outside
Blow in	Yes
Euro fire class according to EN 13501-6	Fca

Mechanical specification

Tensile load short term (Tm)	6000 N
Max. fiber strain at Tm	0,6 %
Tensile load Long Term (TI)	3000 N
Max. fiber strain at TI	0,2 %
Min. bending radius during installation	255 mm
Min. bending radius after installation	190 mm
Crush resistance acc. meth.E3A	1500 N/dm
Crush resistance E3A short (1min)	3000 N/dm
Crush resistance E3A long	1000 N/dm
Crush load E3A long application time	10 min
Striking surface radius	300 mm
Torsion resistance	360 °/m

Optical specification

Category according to EN 50173	OS2
Max. attenuation @ 1310 nm	0,35 dB/km
Max. attenuation @ 1550 nm	0,22 dB/km
Max. attenuation @ 1625 nm	0,25 dB/km



Environmental specification

Longitudinal water blocking	Yes
Longitudinal watertight construction	Super Absorbing Polymer
Cable longitudinally watertight	Yes
Installation temperature	-15/55 °C
Transportation and storage temperature	-40/70 °C
Operational temperature range Ta1 - Tb1	-30/70 °C
Max. attenuation increase during Ta1 - Tb1	0,05 dB
Operational temperature range Ta2 - Tb2	-40/70 °C
Max. attenuation increase during Ta2 - Tb2	0,15 dB
TC sample length for TC acc. F1 or F12	1000 m
UV resistant	Yes
UV-protection	ISO 4892/2
With rodent protection	Yes

Other specification

Halogen free (acc. EN 60754-1/2)	Yes
----------------------------------	-----

Logistical specifications

Unit	meter
Netto Weight (kg/m)	0.131
Default packaging	H X 12000/600



Fibre specification G.657.A1

ACE-DS-OT-VSP-SM-G657A1-v03-e

date : 11-08-2020

Technical product information

Product characteristics - optical fibers

Fibre

Type of fibre	Hydrogen passivated, dispersion unshifted, matched cladding bending loss insensitive single mode fibre 9/125 µm Full compatible with G.652.D fibre Optical and geometrical properties exceed ITU-recommendations G.652.D and G.657.A1
Standard	IEC-60793-2-50, B-657.A1
Standard	ITU-T G.657.A1

Characteristics

Parameter	Properties	Unit
Mode field diameter: 1310 nm	9.0 ± 0.3	µm
Mode field diameter: 1550 nm	10.2 ± 0.4	µm
Core non-circularity	max. 6	%
Core/cladding concentricity error	max. 0.4	µm
Cladding diameter	125.0 ± 0.5	µm
Cladding non-circularity	max. 0.7	%
Coating diameter	242 ± 5	µm
Coating/cladding concentricity error	max. 8	µm
Temperature sensitivity: -60 to +85 °C	max. 0.05	dB/km
Bending sensitivity - 100 turns around Ø50 mm - 1550 nm	max. 0.05	dB
Bending sensitivity - 100 turns around Ø60 mm - 1625 nm	max. 0.05	dB
Bending sensitivity - 10 turns around Ø30 mm - 1550 nm	max. 0.1	dB
Bending sensitivity - 10 turns around Ø30 mm - 1625 nm	max. 0.3	dB
Bending sensitivity - 1 turn around Ø20 mm - 1550 nm	max. 0.75	dB
Bending sensitivity - 1 turn around Ø20 mm - 1625 nm	max. 1.5	dB
Proof test level	min. 0.70	GPa
Fibre curl	min. 4	m
Cable cut-off wavelength	max. 1260	nm
Zero-dispersion wavelength	1300 – 1324	nm
Zero-dispersion slope	max. 0.090	ps/nm ² ·km
Chromatic dispersion: 1285 nm – 1330 nm	max. 3.2	ps/nm·km
Chromatic dispersion: 1550 nm	max. 17	ps/nm·km
Chromatic dispersion: 1625 nm	max. 21	ps/nm·km
Polarisation mode dispersion: max. individual fibre	max. 0.1	ps/nm·km
PMD _Q	max. 0.06	ps/√km
Max. attenuation at 1383 nm (α ₁₃₈₃) [note a]	< max. α ₁₃₁₀	-
Effective group core refractive index: 1310 nm	1.4671	-
Effective group core refractive index: 1550 nm	1.4675	-
Effective group core refractive index: 1625 nm	1.4680	-


note a: after hydrogen ageing

TECHNICAL PRODUCT INFORMATION

Cable construction and colour code

LTC-S RP

FO cable with stranded loose tubes - Rodent protection

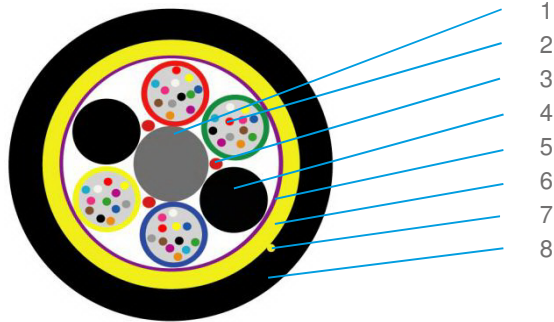

Description

- 1 Central element (FRP), optional with overshooth
- 2 Loose tube with optical fibres
- 3 Waterblocking yarns or tape
- 4 Filler
- 5 Waterblocking tape
- 6 Glass yarn strength members (rodent protection)
- 7 Ripcord (optional)
- 8 Outer sheath

Standard colours

Fibres		Tubes	
Group 1	Group 2	Layer 1	
1 Red	13 Red +t	1 Red	
2 Green	14 Green +t	2 Green	
3 Blue	15 Blue +t	3 Blue	
4 Yellow	16 Yellow +t	4 Yellow	
5 White	17 White +t	5 White	
6 Grey	18 Grey +t	6 Grey	
7 Brown	19 Brown +t	7 Brown	
8 Violet	20 Violet +t	8 Violet	
9 Turquoise	21 Turquoise +t	9 Turquoise	
10 Black	22 Natural +t	10 Black	
11 Orange	23 Orange +t	11 Orange	
12 Pink	24 Pink +t	12 Pink	

note +t: indicates a black tracer