

TRIANGLE



5744065

ES-SYSTEM



A system of triangular luminaires with a registered design with unlimited possibilities for the creation of three-dimensional spatial structures. The extruded aluminum profile with its asymmetrically mounted diffuser gives the luminaire a unique look. Tool-free adjustment of the luminaire's suspension height. Luminaire type: Decorative luminaires; Mounting type: pendant; Mounting location: ceiling; Luminous flux: 3800lm; Maximum luminous efficacy: 119lm/W; Correlated color temperature: 4000K ; Color rendering index (CRI): >80; Median useful life: L70B50 - 176000 h, L80B50 - 111000 h, L90B50 - 53000 h; Standard Deviation of Color Matching (SDCM): SDCM <3; Photobiological risk group: ; Photobiological risk group: 0; Luminous intensity distribution direction: direct; Frame color: black, smooth matte, RAL9005; Luminous intensity distribution: very wide; Luminous intensity distribution geometry: symmetrical; Unified glare rating (UGR): 17 - 24; Angle 65° luminance: <3000; Voltage: 230V AC; Power: 32W; Wired lighting control: DALI; IP Code: IP20; IEC protection class: I; Diffuser material: PMMA; Diffuser type: microprismatic; Housing material: Aluminum profile; Luminaire shape: triangular; Permissible ambient temperature range: from 0°C to 25°C; Circuit load capacity (B10): 11; Circuit load capacity (B16): 19; Connector type: 5-pole; Dimensions: Height: 80mm, Width: 650mm, Length: 563mm, ; Weight: 3.80kg; Energy efficiency class: A+; Tilted: No; Registered design: Yes; EAN: 5901155630737;

Luminaire type	Decorative luminaires
Mounting type	pendant
Mounting location	ceiling
Luminous flux	3800lm
Maximum luminous efficacy	119lm/W
Correlated color temperature	4000K
Color rendering index (CRI)	>80
Median useful life	L70B50 - 176000 h L80B50 - 111000 h L90B50 - 53000 h
Standard Deviation of Color Matching (SDCM)	SDCM <3
Photobiological risk group	0
Luminous intensity distribution direction	direct
Frame color	black, smooth matte, RAL9005
Luminous intensity distribution	very wide
Luminous intensity distribution geometry	symmetrical
Unified glare rating (UGR)	17 - 24
Angle 65° luminance	<3000
Voltage	230V AC
Power	32W
Wired lighting control	DALI
IP Code	IP20
IEC protection class	I
Diffuser material	PMMA
Diffuser type	microprismatic
Housing material	Aluminum profile
Luminaire shape	triangular

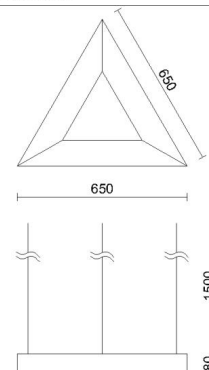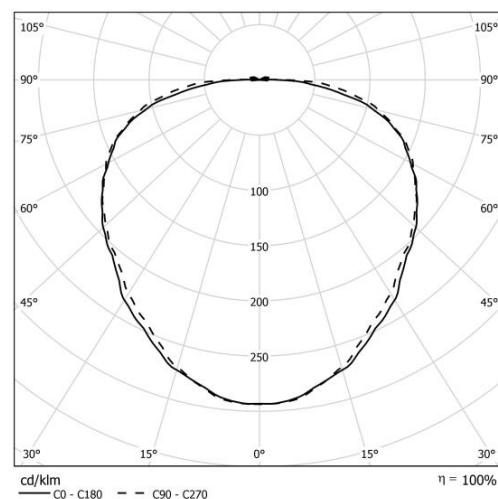


Permissible ambient temperature range	from 0°C to 25°C
Circuit load capacity (B10)	11
Circuit load capacity (B16)	19
Connector type	5-pole
Dimensions	Height: 80mm Width: 650mm Length: 563mm
Weight	3.80kg
Energy efficiency class	A+
Registered design	Yes
EAN	5901155630737

Accessories supplied with the product

Ceiling box with a 1.5 m long power cable and suspension wires

Additional accessories




9891000 Clip for connecting two luminaires by their sides



9895005 Black top cover



9893005 A set of black mounting brackets for surface mounting on ceilings



9892005 A bracket for connecting two luminaires by the corners, black



8751003 VERTEX controller