


# S/FTP 4x2x22 AWG CAT.5E FR PH120

Data transmission cables, Al/Pet tape and tinned copper braid screened, fire resistant, fire retardant and halogen-free.

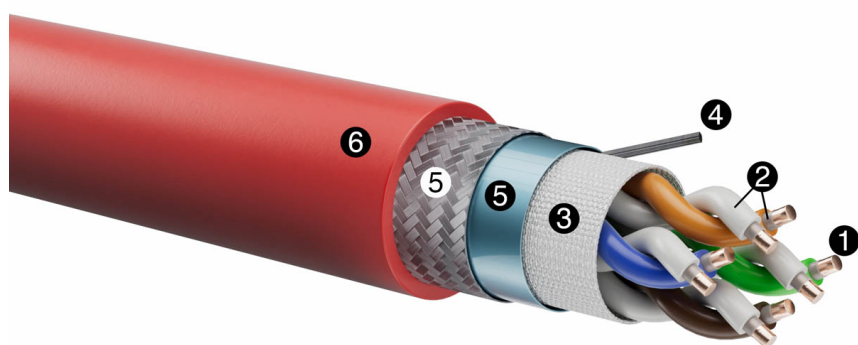

## Legend

- |                     |           |
|---------------------|-----------|
| 1. Conductor        | 6. Sheath |
| 2. Insulation       |           |
| 3. Flame protection |           |
| 4. Drain wire       |           |
| 5. Screen           |           |



CPR CLASSIFICATIONS  
**B2ca-s1a,d1,a1**



View the product  
on the website

## DETAILS

### Key features

For fixed installation indoors and outdoors (UV protected), on metallic structures, cable trays, pipes, raceways and similar systems. Underground installation is not permitted. They can be laid in the same conduit with circuits of electrical systems with rated voltage up to 400 V to ground, typically in 230/400 V power systems.

### Application

Used for high-frequency data transmission, when there is a need to guarantee signal transmission even in the presence of fire (video surveillance systems, interconnections of central units for voice evacuation systems and fire detection systems). In environments at greatest risk in case of fire. Places characterized by high density occupation and difficult conditions of evacuation such as terminals, railway stations, maritime stations, subways, road and railway tunnels (High risk).

## TECHNICAL SPECIFICATIONS

Features	Values	Rules
Conductors:	annealed red copper (22AWG)	
Insulation 1:	LSZH PP thermoplastic compound	
Insulation 2:	LSZH silicone rubber	
Cores colour :	withe/blue - white/orange - withe/green - white/brown	
Flame protection:	glass-fibre tape	
Drain wire:	annealed tinned copper 7x0,30mm	
Screen:	Al/Pet tape	
Screen:	braid of annealed tinned copper	
Sheath:	LSZH special thermoplastic compound	
Sheath colour :	red RAL 3000	
Fire retardant :	duratation 120 min. at 830 °C.(- 0 ÷ + 40 °C)	CEI EN 50200 PH120
Fire retardant :	duration 180 min. at temperature of 750 °C	IEC 60331-21 - VDE 472-814 FE180
DC resistance:	< 120 ohm/km (loop)	
Impedance:	100 ±5 W a 100 MHz	
Cond-cond capacitance:	of the order of 60 nF/km (1kHz)	
Cond-shield capacitance :	of the order of 85 nF/km (1kHz)	
Inductance:	of the order of 0,75 mH/km (1kHz)	
Testing voltage :	700 Vac x 1 min.	
Max working temperature :	70 °C	
Min. installation temperature :	0 °C	
Bending radius :	Ø x 8	

## UE REGULATION 305/2011

Features	Values	Rules
SYSTEM AVCP	1+	EN 50575:2014 + A1:2016
Classification	B2ca-s1a,d1,a1	UNI EN 13501-6
B2ca	Heat release and flame spread (FS ≤ 1.5m)	EN 50399
s1a	Smoke transmittance ≥ 80% (TSP ≤ 50 m2 and SPR ≤ 0.25 m2/s)	EN 50399 + EN 61034-2
d1	No flaming droplets/particles persisting longer than 10 seconds	EN 50399
a1	Gas acidity (Conductivity <2,5 ms/mm e pH> 4,3)	EN 50267-2-3
	Flame propagation (H ≤ 425 mm)	EN 60332-1-2
Printing:	BERICA CAVI S.P.A. ITALY S/FTP 4x2x22 AWG Cat.5E FR PH120 Uo= 400 V 100 OHM B2ca-s1a,d1,a1 CE Year/lot - 00000m	

## VARIANTS

TYPE	Ø MEDIUM	MEDIUM	CODE
N° x mm²	EXTERIOR	WEIGHT	
	mm	kg/km	
S/FTP 4x2x22AWG	10,2	108	B75B04CA22FR

L'azienda si riserva la facoltà di modificare/adeguare senza preavviso le informazioni tecniche e dimensionali dei prodotti inseriti nel sito.