


Product data sheet

TV-FM socket outlet insert

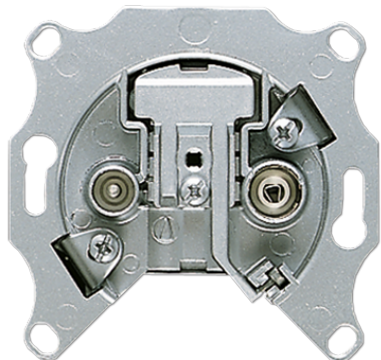

Reference number

EDU 04 F

TV-FM socket outlet insert

with screwless terminals
for cable TV and SAT distribution
Frequency range 5 ... 2400 MHz without gaps on both outputs.
Housing: torsion-resistant, passivated diecast zinc

Terminated outlets are used for individual and community installation (BK, CATV, MATV)
connected to decoupling stub lines.

Covers:

AS / A ranges: ref.-no.: A 561 PLTV ..

CD range: ref.-no.: CD 561 SAT ..

LS range: ref.-no.: ..990 TV ..

50 x 50: ref.-no.: 161 TV

Technical data

IN – TV (IEC male)

Frequency range: 5 ... 2150 (2400) MHz

Attenuation: 4.0 dB

IN – RF (IEC female)

Frequency range: 5 ... 2150 (2400) MHz

Attenuation: 4.0 dB

Isolation

TV – RF: VHF, UHF / SAT: 20/20 dB

DC through

TV – IN (IEC male): 13/18 V, 22 kHz
max. +24 V/0.5 A

Version:

Terminated outlet