

Fully insulated push-on female connectors, NCI ... B PCV

FEATURES & BENEFITS

- female push-on connector with long PVC insulating sleeve
- low-cost version for less demanding applications, without internal Cu sleeve
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100


MECHANICAL DATA

Insulation polyvinyl chloride (PCV)

Material brass

Covering tin-plated

Operating temperature [°C] -5 ÷ +60

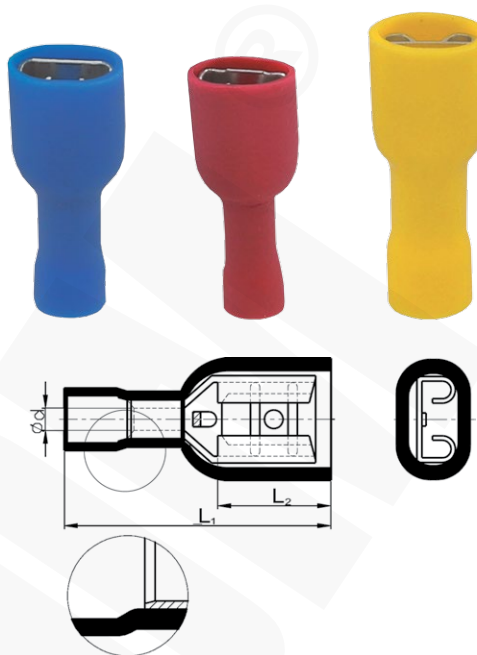

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
NCI 4,8-1/0,5 BPCV (100 PCS)	E10KN-03010400201	0,75+1	red	4,8x0,5	1,7	20,5	6,5	0,08
NCI 4,8-1/0,8 BPCV (100 PCS)	E10KN-03010400301			4,8x0,8				
NCI 6,3-1/0,8 BPCV (100 PCS)	E10KN-03010400601	1,5+2,5	blue	6,3x0,8	2,3	22,0	7,2	0,1
NCI 4,8-2,5/0,5 BPCV (100 PCS)	E10KN-03010400401			4,8x0,5		20,0	6,5	0,08
NCI 4,8-2,5/0,8 BPCV (100 PCS)	E10KN-03010400501			4,8x0,8				
NCI 6,3-2,5/0,8 BPCV (100 PCS)	E10KN-03010400701			6,3x0,8	22,0	7,2	0,12	
NCI 6,3-6/0,8 BPCV (100 PCS)	E10KN-03010400801	4+6	yellow	6,3x0,8	3,4	24,0	7,2	0,15